

# (12) UK Patent Application (19) GB (11) 2 327 408 (13) A

(43) Date of A Publication 27.01.1999

(21) Application No 9715475.1

(22) Date of Filing 22.07.1997

(71) Applicant(s)  
Bespak Plc  
(Incorporated in the United Kingdom)  
Bergen Way, North Lynn Industrial Estate,  
KING'S LYNN, Norfolk, PE30 2JJ, United Kingdom

(72) Inventor(s)  
Geoff Brace

(74) Agent and/or Address for Service  
Boult Wade Tennant  
27 Fumival Street, LONDON, EC4A 1PQ,  
United Kingdom

(51) INT CL<sup>6</sup>  
B65D 51/28 81/32

(52) UK CL (Edition Q )  
B8D DSC1 D12 D7PY D7P1

(58) Documents Cited  
GB 2298406 A GB 1142293 A WO 88/01973 A1  
US 4614267 A

(58) Field of Search  
UK CL (Edition O ) B8D DSC1  
INT CL<sup>6</sup> B65D 25/08 51/28 81/32  
Online: WPI

(54) Abstract Title  
Dual compartment dispensing apparatus

(57) A dispensing apparatus 1 for storing two components prior to mixing comprises a first container 2 with an outlet 5 or 27, a second container 7 located within the first container, and attachment means 20 for releasably securing the second container to the first container. The second container may be released by manipulating an externally accessible part of the first container, for instance by rotating a screw-threaded or push-fit closure member 6 about a first axis, the second container being secured to the member at a point off-set from the first axis, and being released by engagement with an obstruction 26 in the first container. Alternatively, at least a part of the first container may be flexible so that an internal part of the first container can contact and release the second container. The second container may be attached to the first container via an O-ring 24, and may cover the outlet 27 which may be used to fill the second container.


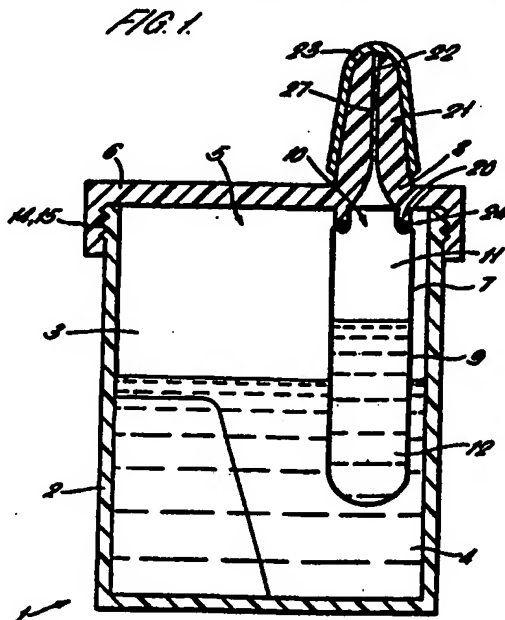


FIG. 1

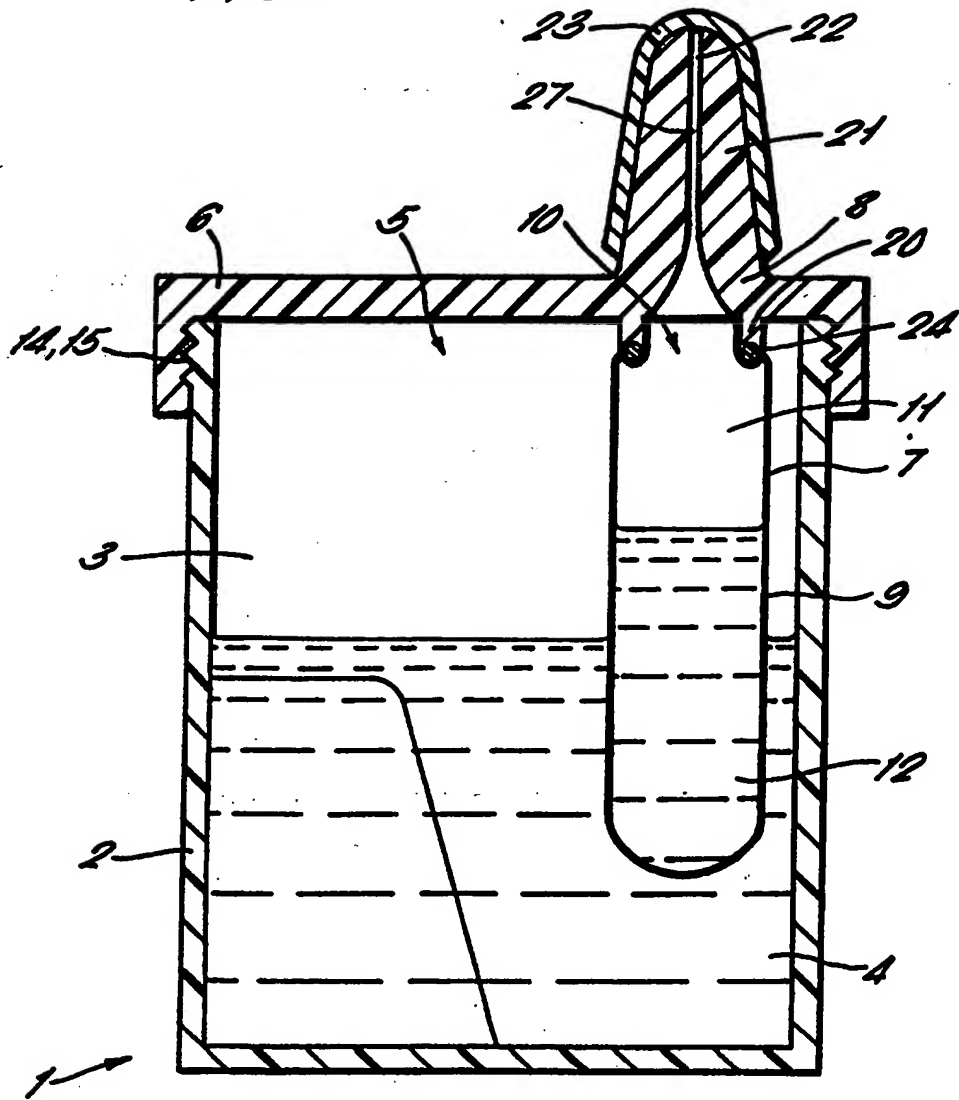

DUAL COMPARTMENT DISPENSING APPARATUS

5

This invention relates to an apparatus for separately storing and subsequently mixing two components of a substance to be dispensed.

10 Dual compartment dispensers for pharmaceutical, cosmetic and other fluid preparations typically comprise a chamber receiving a liquid and a separate compartment for a powder or liquid which is required to be separately stored until immediately prior to use  
15 of the mixture, this being particularly necessary where the mixture degrades rapidly with age.

Some known arrangements rely upon a seal being penetrated by a needle to initiate mixing, such  
20 arrangements being complex and requiring assembly from numerous components.

It is also known from US 4614267 to provide a vial which can be manually opened by manipulation  
25 through the sides of a flexible container within which it extends. Such an arrangement is, however, unsuitable to most applications where rigid or semi-rigid containers are required.

30 According to the present invention, there is disclosed apparatus for separately storing and subsequently mixing first and second components of a substance to be dispensed, the apparatus comprising:-

35 a first container;

a second container located within the first container;

first outlet means allowing dispensing of the substance from the first container; and

5 attachment means attaching the second container to the first container; wherein

the first container stores the first component prior to mixing;

10 the second container stores the second component separated from the first component prior to mixing;

the attachment means releasably secures the second container within the first container, the second container being releasable from attachment to  
15 the first container by a user of the apparatus and release of the second container from attachment to the first container allowing the second component stored in the second container to mix with the first component stored in the first container to form the  
20 substance in the first container, which substance is then dispensed via the first outlet means.

Preferably the user releases the second container from attachment to the first container by manipulation  
25 of an externally accessible part of the first container.

In a first embodiment of the present invention the first container has a rotatable part which is  
30 rotatable relative to the remainder of the first container and the second container is released from attachment to the first container by rotating the rotatable part.

35 It is desired that the rotatable part is

rotatable about a first axis relative to the remainder of the first container;

5       the attachment means releasably attaches the second container to the rotatable member at a point off-set from the first axis of the container; and  
10       an obstruction is provided in the first container such that as the rotatable member is rotated relative to the remainder of the first container, the second container is engaged by the obstruction and the engagement of the second container is thereby released from attachment to the second container.

15       The rotatable member is rotatably mounted to the remainder of the first container by co-operating screw-thread formations, the screw-thread formations being operable to urge the rotatable member into sealing engagement with the remainder of the first  
20       container in response to rotation of the rotatable member relative to the remainder of the first container.

25       Alternatively the rotatable member is mounted to the remainder of the first container by means of a push-fit, the rotatable member being retained by the interference between a circumferential rib on the first container with a circumferential groove on the rotatable member, the rotatable member being free to  
30       rotate relative to the remainder of the first container.

35       In a second embodiment of the present invention at least a part of the first container is flexible whereby the first container can be flexed sufficiently

to bring an internal part of the first container into engagement with the second container and thereby release the second container from attachment to the first container.

5

Advantageously the attachment means secures the second container in a location covering the first outlet means so that the second container both prevents egress from the first container and is  
10 fillable with the second component via the first outlet means.

Preferred embodiments of the present invention will now be described by way of example only and with  
15 reference to the accompanying drawing, in which:

Figure 1 is a sectioned elevation of an apparatus in accordance with the present invention.

20 An apparatus 1 according to a first embodiment of the present invention as shown in Figure 1 consists of a first container 2 defining a chamber 3, in which a liquid first component 4 is stored and an outlet 5 at an upper end. The first container 2 comprises a  
25 rotatable closure member 6 which closes the upper end.

The apparatus 1 further comprises a second container 7, within the first container 2, of which a first portion 8 is formed unitarily with the closure  
30 member 6 and is off-set from a first, central longitudinal axis of the first container 2, and of which a second portion 9 is cylindrically walled and cup-shaped with a mouth 10 sealed by the first portion 8. The second portion 9 is not limited to being  
35 cylindrical and may be any shape capable of being

contained within the first container 2. The first  
portion 8 comprises a cylindrical portion 20 engagable  
with the second portion 9 of the second container 7  
and a nozzle 21 protruding from the upper surface of  
5 the closure member 6. The nozzle 21 has a nozzle  
opening 22 communicating with the inside of the second  
container 7 via a first outlet 27 which may be sealed  
by a closure cap 23. The closure cap 23 may consist  
10 of a push-fit stopper which sealingly engages the  
nozzle opening 22 or may alternatively comprise a  
screw-threaded or push-fit cap engagable with the  
external surface of the nozzle 21. The first outlet 27  
may alternatively be sealed by a snap-off tip such as  
15 is commonly found on glue dispensing tubes, wherein  
snapping off of a portion of the nozzle 21 exposes the  
first outlet 27.

The second container 7 thereby defines a closed  
compartment 11 in which a liquid second component 12  
20 is stored separately from the first component 4 prior  
to mixing.

The first container 2 is bottle shaped and may be  
formed of a flexible or semi-rigid plastics material.  
25

The closure member 6 of the first container 2 may  
be formed so that the closure member 6 is a push-fit  
onto a remainder of the first container 2. A  
circumferential rib on an external surface of the  
30 first container 2 and a circumferential groove on an  
internal surface of the closure member 6 provide a  
means of resiliently retaining the closure member 6 on  
the remainder of the first container 2 during use of  
the apparatus 1. The rib and groove restrict axial  
35 movement of the closure member 6 relative to the first

container 2 but allows the closure member 6 to freely rotate about the first longitudinal axis of the first container 2. Equally, the circumferential groove could be on an external surface of the remainder of the first container 2 and the circumferential rib on an internal surface of the closure member 6.

Alternatively the remainder of the first container 2 is provided with external screw-threads 14 engaging with co-operating internal screw-threads 15 on the closure member 6. The screw-threads 14 and 15 are ramped to allow the closure member 6 to be assembled by axial movement onto the remainder of the first container 2, the ramped shape of the screw-threads allowing the diameter of the closure member 6 to be momentarily increased by resilient deformation during assembly.

Thus the rotatable closure member 6 forms a rotatable part of the first container 2, rotatable relative to the remainder of the first container 2.

The first and second portions 8 and 9 of the second container 7 may be separate components sealingly engaging with one another by means of a push-fit. The integrity of the seal between the first and second portions 8 and 9 may be improved by incorporating an O-ring 24 between the first and second portions 8 and 9. Thus the push-fit between the first and second portions 8 and 9 forms a means of attaching the second container 7 within the first container 2. Alternatively, the second container 7 may consist of a single component having an area of weakness at the junction between the first and second portions 8 and 9. This area of weakness may consist



of a scored circumferential line around the second container 7 or a portion of the second container 7 where the thickness of the wall is thinner than in the remainder of the second container 7. Thus the manufacture of the second container 7 as a single component connected to the closure member 6 forms an alternative means of attaching the second container 7 within the first container 2. The second container 7 may be manufactured from a plastics material, glass, or other suitable material.

The operation of the apparatus 1 will now be described.

Preferably, the apparatus 1 is sold having the first and second liquid components 4 and 12 already contained within the first and second chambers 3 and 11. The first chamber 3 is filled through the outlet 5 before the remainder of the first container 2 is sealed by the rotatable closure member 6. In the case where the first and second portions 8 and 9 are separate components the second chamber 11 may be filled through the mouth 10 of the second portion 9 before it is sealingly engaged with the first portion 8. Alternatively, where the second container 7 is a single component, the second chamber 11 is filled through the first outlet 27. Alternatively the single component second chamber 7 can be filled through a base portion of the second container and then the base portion can be sealed, for example by heat sealing the material. The closure cap 23, if used, is then sealingly engaged with the nozzle opening 22 and the rotatable closure member 6 is sealingly engaged with the first container 2.

In order to dispense the two components 4 and 12, a user of the apparatus 1 rotates the closure member 6 relative to the remainder of the first container 2 about the longitudinal axis of the first container 2.

5 Where the closure member 6 is a push-fit onto the remainder of the first container 2 the closure member 6 may be rotated either in the clock-wise or anti-clockwise sense without altering the operation of the apparatus 1. Where the closure member 6 is a screw

10 fit, the closure member 6 would be operable by rotating in a single sense. It should be noted that the screw-threads 14, 15 are such that adequate rotation of the closure member 6 in order to disengage the second portion 9 is possible without detaching the

15 closure member 6 from the remainder of the first container 2. Since the first portion 8 of the second container 7 is formed with the closure member 6 offset from the first, central axis of the first container 2 rotation of the closure member 6 causes

20 the second container 7 to move within the first container 2, as seen in plan view of the apparatus 1. An inwardly extending flange 26 joined to the internal surface of the first container 2 forms an obstruction blocking the movement of the second container 7.

25 Preferably, the flange 26 is positioned towards the base of the first container 2. As the second container 7 is moved within the first container 2, the second portion 9 strikes the flange 26 and is thus disengaged, as the closure member 6 and first portion

30 8 are further rotated, from the second portion 8 either by means of the first and second portions 8 and 9 disconnecting or the single component second container 7 breaking at the area of weakness. Thus the second portion 9 of the second container 7 falls

35 into the first container 2 and the first and second

liquid components 4 and 12 are free to mix. The obstruction need not be a flange but can equally be any obstruction wherein movement of the second container 7 laterally brings the second container 7 into contact with the obstruction, for example, the second portion 9 may be positioned in and surrounded by a bowl-shaped depression.

Mixing of the two components 4 and 12 may be aided by shaking the apparatus 1.

The closure cap 23 is then removed from the nozzle opening 22 and the liquid is dispensed back through the first portion 8 of the second container 7 and the nozzle 21 and nozzle opening 22. Preferably, the first container 2 is semi-rigid and squeezable and dispensation of the liquid is aided by squeezing the first container 2 to dispel the liquid through the nozzle opening 22.

Alternatively the apparatus 1 according to a second embodiment of the present invention comprises a closure member 6 which is not rotatable but is operated by squeezing the first container 2, made from a semi-rigid material, so that an internal part of the first container 2 comes into contact with the second portion 9 of the second container 7 causing the second portion 9 to disengage from the first portion 8, either by the disconnection of the first and second portions 8 and 9 or the breaking of the area of weakness of the second container 7. The two components 4 and 12 are then free to mix and be dispensed as described above. The material of the first container 2 must be sufficiently flexible to allow an internal part of the first container 2 to contact the second

container 7.

5 The apparatus is not limited to the mixing of two  
liquids and may alternatively be used to mix a  
powdered component and a liquid component together.  
The powdered component may be in the first chamber 3  
and the liquid component in the second chamber 11.  
Alternatively, the powdered component could be in the  
10 second chamber 11 and the liquid component in the  
first chamber 3.

15 It is to be desired that the second container 7  
is made of a rigid material, whether glass or plastic.  
This is advantageous in that external manipulation of  
the first container 2 will not apply increased  
pressure to the second liquid component 12 in the  
20 second chamber 11 before the two liquid components 4  
and 12 have been mixed. This helps to prevent the  
second liquid component 12 being dispensed on its own  
through the nozzle opening 22, either accidentally or  
through deliberate misuse of the apparatus 1.

25 It should be appreciated that modifications may  
be made to the apparatus as described above without  
departing from the scope of the invention as set out  
in the attached claims.

**CLAIMS:**

1. Apparatus for separately storing and subsequently  
5 mixing first and second components of a substance to  
be dispensed, the apparatus comprising:-

a first container;  
a second container located within the first  
10 container;  
first outlet means allowing dispensing of the  
substance from the first container; and  
attachment means attaching the second container  
to the first container; wherein

15 the first container stores the first component  
prior to mixing;

the second container stores the second component  
separated from the first component prior to mixing;

20 the attachment means releasably secures the  
second container within the first container, the  
second container being releasable from attachment to  
the first container by a user of the apparatus and  
release of the second container from attachment to the  
25 first container allowing the second component stored  
in the second container to mix with the first  
component stored in the first container to form the  
substance in the first container, which substance is  
then dispensed via the first outlet means.

30

2. Apparatus as claimed in claim 1 wherein the user  
releases the second container from attachment to the  
first container by manipulation of an externally  
accessible part of the first container.

35

3. Apparatus as claimed in claim 2 wherein the first container has a rotatable part which is rotatable relative to the remainder of the first container and the second container is released from attachment to the first container by rotating the rotatable part.

4. Apparatus as claimed in claim 3 wherein:-

the rotatable part is rotatable about a first axis relative to the remainder of the first container;  
the attachment means releasably attaches the second container to the rotatable member at a point off-set from the first axis of the container; and  
an obstruction is provided in the first container such that as the rotatable member is rotated relative to the remainder of the first container, the second container is engaged by the obstruction and the engagement of the second container is thereby released from attachment to the second container.

5. Apparatus as claimed in claim 4, wherein the rotatable member is rotatably mounted to the remainder of the first container by co-operating screw-thread formations, the screw-thread formations being operable to urge the rotatable member into sealing engagement with the remainder of the first container in response to rotation of the rotatable member relative to the remainder of the first container.

6. Apparatus as claimed in claim 4, wherein the rotatable member is mounted to the remainder of the first container by means of a push-fit, the rotatable

member being retained by the interference between a circumferential rib on the first container with a circumferential groove on the rotatable member, the rotatable member being free to rotate relative to the remainder of the first container.

7. Apparatus as claimed in claim 1 or claim 2, wherein at least a part of the first container is flexible whereby the first container can be flexed sufficiently to bring an internal part of the first container into engagement with the second container and thereby release the second container from attachment to the first container.

8. Apparatus as claimed in claim 7, wherein the attachment means secures the second container in a location covering the first outlet means so that the second container both prevents egress from the first container and is fillable with the second component via the first outlet means.

9. Apparatus substantially as hereinbefore described with reference to and as shown in the accompanying drawing.

ST17676/2



Application No: GB 9715475.1  
Claims searched: 1-9

Examiner: Michael Logan  
Date of search: 21 October 1997

**Patents Act 1977**  
**Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.O): B8D (DSC1)

Int CI (Ed.6): B65D 25/08, 51/28, 81/32

Other: Online: WPI

**Documents considered to be relevant:**

Category	Identity of document and relevant passage	Relevant to claims
X, Y	GB 2298406 A (BESPAK) see especially figs 7-11	X:1-3 Y:8
X	GB 1142293 (MODERN) whole document relevant	1-4
X	WO 88/01973 A1 (WELLA) whole document relevant	1-6
X, Y	US 4614267 (ABBOTT) see figs 1-3	X:1,2,7 Y:8

X Document indicating lack of novelty or inventive step  
Y Document indicating lack of inventive step if combined with one or more other documents of same category.

& Member of the same patent family

A Document indicating technological background and/or state of the art.  
P Document published on or after the declared priority date but before the filing date of this invention.  
E Patent documents published on or after, but with priority date earlier than, the filing date of this application.